

# 6.3 Digital Input

With WCC Lite hardware version 1.4, a digital input functionality has been introduced. Software configuration guidelines are discussed in the **WCC Lite internal signals** section. It changes state when the voltage is between 12-48V (The supported range is between 10-60V).

Input voltage	12-48 VDC (accepts 10-60V)
Protection	±60 VDC reverse polarity protection Isolated from the main logic

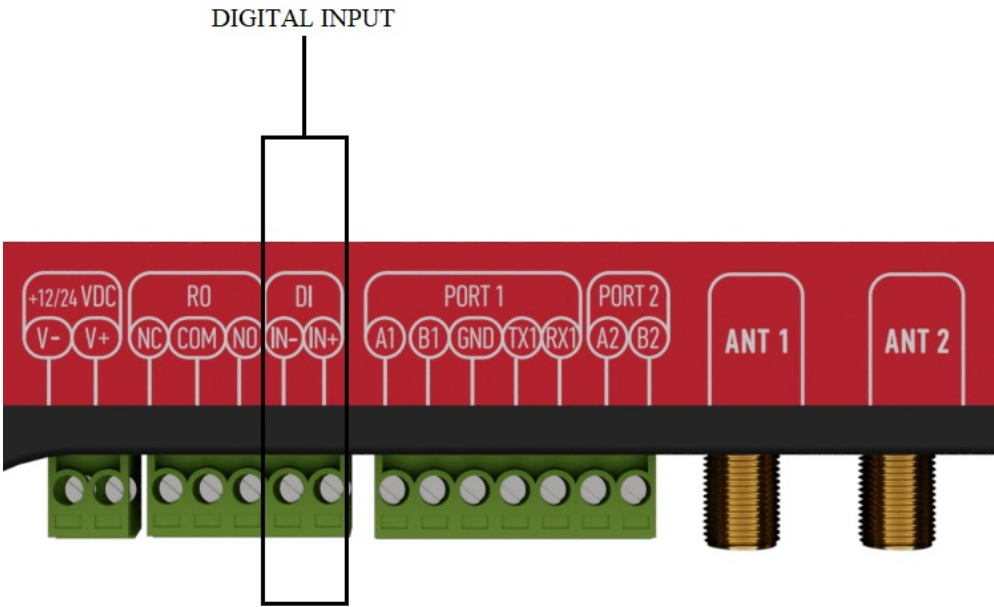


Figure 11: Signal relay connector

⌚Revision #2  
★Created 26 January 2024 13:13:14 by Gabriele  
✎Updated 13 June 2024 08:45:39 by Gabriele