

# 5 Installing the WCC Lite


## Mounting

To mount the device:

1. Secure the top of the mounting clip onto a DIN rail.
2. Push the bottom of a device forward to fix the clip in place.


To dismount the device:


1. Pull red colored clip downwards (found at the bottom side of the DIN rail).
2. Pull back the bottom of the device.
3. Pull device upwards to dismount it.

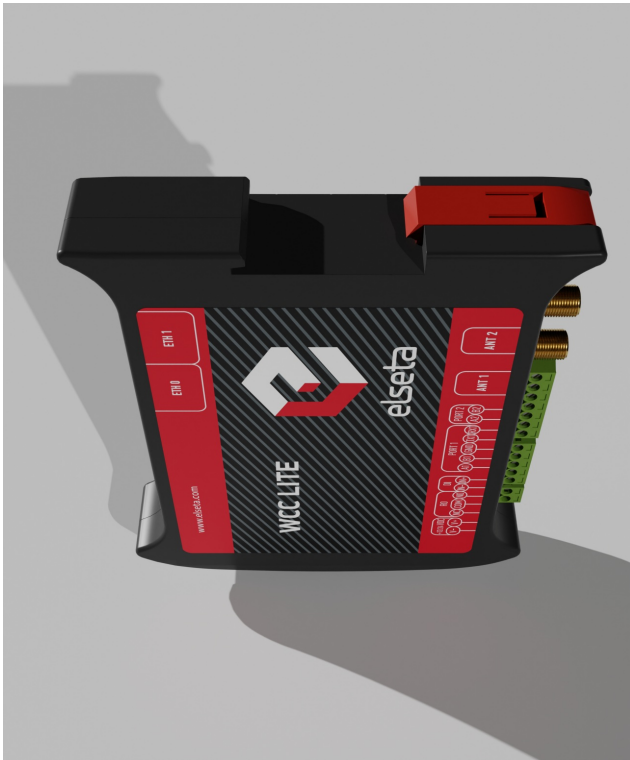

# Power

WCC Lite It is recommended to power WCC Lite from 6W (minimum) 12-24V DC power supply. A full range is 5V to 36V.

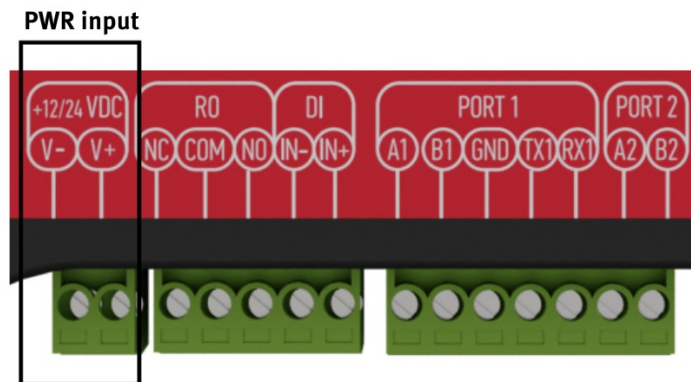

 **Note:** Make sure that device is compatible with your power source before proceeding! Check the label next to power connector or on the side of device.

## SIM card slot (hardware versions older than 1.3)




 As of hardware versions 1.3 onwards single SIM modem support for WCC Lite has been discontinued.

WCC Lite has push-push type microSIM card connector with card detection function. The connector is located on the front panel of WCC Lite. To access it, remove a transparent front panel cover. To insert a SIM card gently push it inside (see Figure below) until it locks in place. Press again to release and remove the card.



## Dual-SIM card slot

WCC Lite has optional Dual-SIM card modem. To access both SIM cards, remove a transparent front panel cover and press through marked hole with small tool until SIM holder pops out.

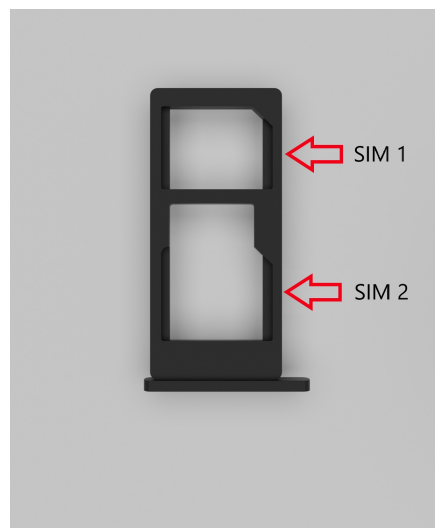

To insert SIM cards, remove Dual-SIM holder and fit SIM cards into it. Insert holder with SIM cards into slot.

**Note:** Be careful when removing or inserting DUAL-SIM holder, as SIM cards can fall out.

**Note:** WCC Lite will automatically detect a SIM card insertion or removing.