

6.3 Digital Input

With WCC Lite hardware version 1.4, a digital input functionality has been introduced. Software configuration guidelines are discussed in the **WCC Lite internal signals** section. It changes state when the voltage is between 12-48V (The supported range is between 10-60V).

Input voltage	12-48 VDC (accepts 10-60V)
Protection	±60 VDC reverse polarity protection Isolated from the main logic

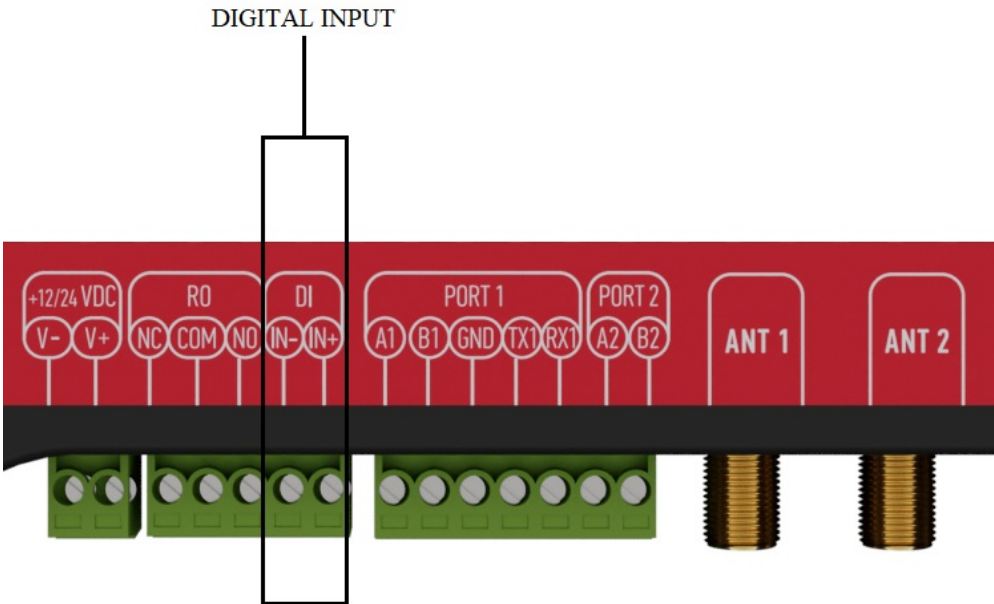


Figure 11: Signal relay connector

⌚Revision #1
★Created 27 February 2025 08:00:43 by Gabriele
✎Updated 27 February 2025 08:08:33 by Gabriele